

Performance Bulletin

YPB#: PB_PRM_250AlanteTriple_F150TLRD_8-8-04_PNT

Test Date:


8/8/04



F150TLRD

Performance Data

RPM	MPH	GPH	MPG
1000	4.3	0.6	7.17
1500	6.3	0.9	7.00
2000	9.0	1.3	6.92
2500	13.2	2.3	5.74
3000	17.3	3.5	4.94
3500	20.7	4.6	4.50
4000	24.0	6.4	3.75
4500	27.6	7.6	3.63
5000	31.1	9.9	3.14
5500	35.4	13.2	2.68
5800	36.8	14.6	2.52

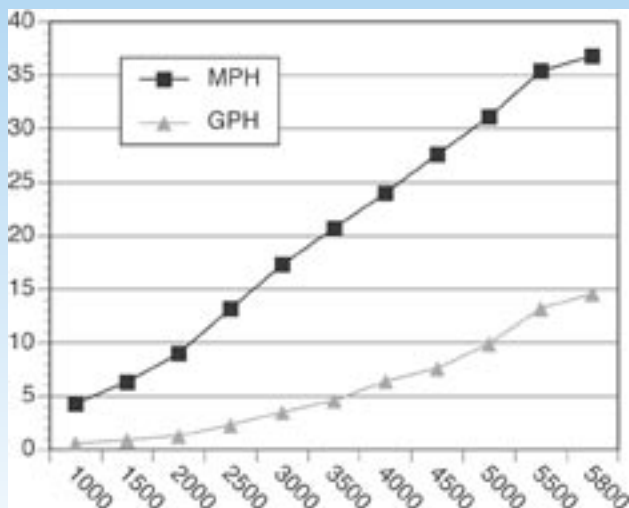

Test performed and certified by Yamaha Application Engineers.

Boat Manufactured By:

Premier Marine • 26612 Fallbrook Avenue • Wyoming, MN 55092
(651) 462-2880 • www.pontoons.com

Boat: 250 Alante Triple

Length	24' 9"
Beam	102"
Dry Weight (approximate)	2,450 lbs.
Max HP	200
Fuel Capacity	25 gals.
Weight as Tested (approximate)	3,560 lbs.

Engine: F150TLRD

Horsepower	150
Fuel Induction	Electronic Fuel Injection
Displacement	163 cu. in.
Weight	466 lbs.
Gear Ratio	2.00
Mounting Height	#1
Propeller (Dia/Pitch)	15-1/4 x 15 S/S
Propeller Part #	6G5-45970-02-98

Test Conditions:

Number of People	2
Air Temperature	78° F
Water Temperature	72° F
Elevation	700 ft.
Wind Velocity	5-10 MPH

Comments:

Test weight includes 20 gallons of fuel, one cranking battery, two people, safety and test equipment. Pontoon diameter is 25".

Note:

Data may vary due to changes in weather, elevation, options and equipment, load and boat bottom conditions. Fuel data gathered with Yamaha Fuel Management System. Speed data gathered with GPS receiver.

Outboard Manufactured By:

Yamaha Motor Corp., USA • OEM Division, Marine Group
1270 Chastain Road NW • Kennesaw, GA 30144
(800) 88-YAMAHAFor other Performance Bulletins, visit www.yamaha-motor.com.